



| 16800 mm | 18500 mm | 19300 mm | 13800 mm | 15520 mm   | L1      | L2      | W1      | W2      | W3      |
|----------|----------|----------|----------|------------|---------|---------|---------|---------|---------|
| 330 kg   | 230 kg   | 120 kg   | 330 kg   | 120/230 kg | 6250 mm | 6946 mm | 5000 mm | 4500 mm | 4000 mm |

BI-ENERGY  
Diesel+AC

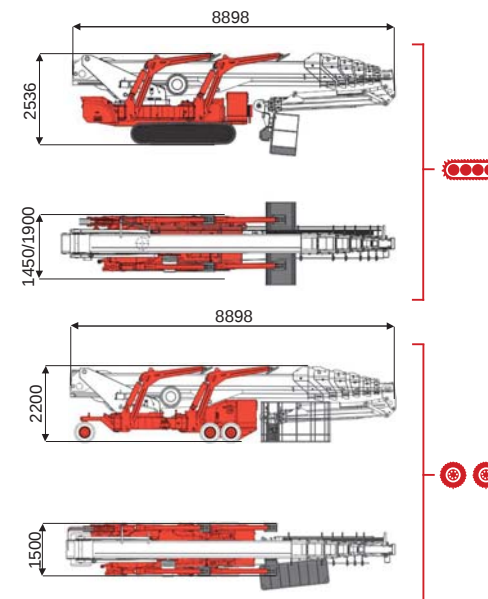

XTJ 48/C-R 49,2 m 19,3 m 330 kg 175° 660° 240x70 cm 90°+80° 4,1-5,3 m 15% 40% 1,5 km/h 13650 kg 80 kN 4,09 kN/m² 6,39 kN/m² 1450/1900 mm 8898 mm 2536 mm

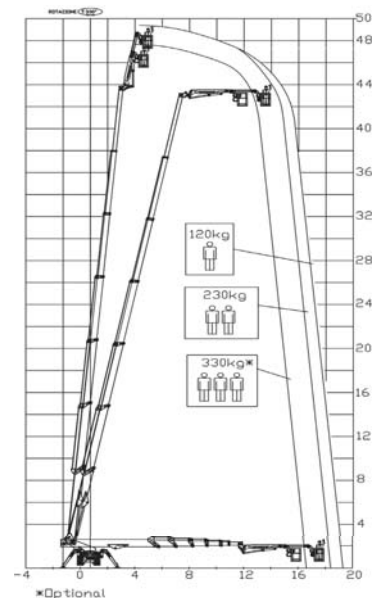

Battery type



Battery charge



Add. Weight



Autonomy



Charging time

Electropump

ECO DC+AC 48V 270 A/h 230V-48V 45A 400 kg 6-7 h endless 7h 48V 9 kW

**Palazzani**  
INDUSTRIE

Palazzani Industrie S.p.A.  
Via del Pavione, 4  
25050 - Paderno F.C. (BS) - Italy  
Tel. (+39) 0306857073 Fax (+39) 030657079  
platforms@palazzani.it  
[www.palazzani.it](http://www.palazzani.it)

COMPANY WITH  
QUALITY SYSTEM  
CERTIFIED BY DNV GL  
= ISO 9001 =

NC 444 A 16